

**Data sheet**

# Pressure independent control valve with integrated flow limiter AVQM (PN 16) - return and flow mounting

**Description**

AVQM is a self-acting flow controller with integrated control valve developed for the use in district heating / cooling systems. The controller prevents flow to exceed set max flow. In a combination with electrical actuators AMV(E) and ECL electronic controllers the flow and temperature can be controlled to achieve highest energy savings.

AVQM has a control valve with adjustable flow limiter, connection neck for electrical actuator and a pressure actuator with one control diaphragm.

Controllers are used together with Danfoss electrical actuators:

- AMV 150 <sup>1)</sup>
- AMV(E) 10 <sup>1)</sup> / AMV(E) 20 / AMV(E) 30
- AMV(E) 13 <sup>1)</sup> / AMV(E) 23 / AMV(E) 33 with spring return function
- AMV(E) 23 SU (spring up)
- AMV 20 SL / AMV 23 SL / AMV 30 SL with stroke limitation

<sup>1)</sup> AMV 150 / AMV(E) 10 / AMV(E) 13 can be combined with DN 15 controller only.

AVQM combined with AMV(E) 13, AMV(E) 23 (SL) or AMV(E) 33 (SL) has been approved according to DIN EN 14597.

**Main data:**

- DN 15-32
- $k_{vs}$  0.4-10 m<sup>3</sup>/h
- Flow range 0.015-6.0 m<sup>3</sup>/h
- PN 16
- Differential pressure over control valve  $\Delta p_{MCV}$  0.2 bar
- Temperature:  
Circulation water / glycolic water up to 30 %:  
2 ... 150 °C
- Connections:  
Ext. thread (weld-on, thread and flange tailpieces)

**Ordering***Example:*

Flow controller with integrated control valve for flow rate 0.7 m<sup>3</sup>/h; PN 16;  $T_{max}$  150 °C; ext. thread

- 1x AVQM DN 15 controller  
Code No: **003H6735**

*Option:*

- 1x Weld-on tailpieces  
Code No: **003H6908**

**AVQM Controller**

Picture	DN (mm)	$Q_{max}$ (m <sup>3</sup> /h)	$k_{vs}$ (m <sup>3</sup> /h)	Connection	Code No.
	15	0.18	0.4	Cylindr. ext. thread acc. to ISO 228/1	<b>003H6733</b>
		0.4	1.0		<b>003H6734</b>
		0.9	1.6		<b>003H6735</b>
		1.6	2.5		<b>003H6736</b>
		2.4	4.0		<b>003H6737</b>
		20	3.5		<b>003H6738</b>
		25	4.5		<b>003H6739</b>
		32	6		<b>003H6740</b>

The controller will be delivered completely assembled, inclusive impulse tube between valve and actuator. Electrical actuator AMV(E) must be ordered separately.

## Ordering (continuous)

## Accessories

Picture	Type designation	DN	Connection		Code No.
	Weld-on tailpieces	15	-		003H6908
		20			003H6909
		25			003H6910
		32			003H6911
	External thread tailpieces	15	Conical ext. thread acc. to EN 10226-1	R 1/2	003H6902
		20		R 3/4	003H6903
		25		R 1	003H6904
		32		R 1 1/4	003H6905
	Flange tailpieces	15	Flanges PN 25, acc. to EN 1092-2		003H6915
		20			003H6916
		25			003H6917

## Service kits

Picture	Type designation	DN	k <sub>vs</sub> (m <sup>3</sup> /h)	Code No.
	Valve insert	15	0.4	003H6861
			1.0	003H6862
			1.6	003H6863
			2.5	003H6864
			4.0	003H6865
		20	6.3	003H6996
		25	8.0	003H6867
		32	10	
	Control valve insert	15	0.4	003H6886
			1.0	003H6887
			1.6	003H6888
			2.5	003H6889
			4.0	003H6890
		20	6.3	003H6891
		25	8.0	003H6892
		32	10	003H6795
	Type designation	Δp setting range (bar)		Code No.
	Actuator	0.2		003H6825
	Type designation	Code No.		
	Locking ring (Rounding order value-5pc)	003G6400		

## Technical data

## Valve

Nominal diameter		DN	15					20	25	32									
k <sub>vs</sub> value of dp controller Range of max. flow setting	$\Delta p_{MCV} = 0.2 \text{ bar}$	m <sup>3</sup> /h	0.4	1.0	1.6	2.5	4.0	6.3	8.0	10									
			0.015	0.02	0.03	0.07	0.07	0.16	0.2	0.16									
			0.18	0.4	0.9	1.6	2.4	3.5	4.5	6.0									
Available Δp required for Q <sub>max</sub>			bar	0.4	0.4	0.5	0.6	0.6	0.5	0.6									
Stroke			mm	5				7											
Control valve authority			1 (100%) in the range of flow setting																
Control characteristic			Logarithmic																
Cavitation factor z			$\geq 0.6$					$\geq 0.55$											
Leakage acc. to standard IEC 534		% of k <sub>vs</sub>	$\leq 0.02$					$\leq 0.05$											
Nominal pressure		PN	16																
Min. differential pressure		bar	see remark <sup>1)</sup>																
Max. differential pressure			12																
Medium			Circulation water / glycolic water up to 30%																
Medium pH			Min. 7, max. 10																
Medium temperature		°C	2 ... 150																
Connections	valve		External thread																
	tailpieces		Weld-on and external thread					Flange											
Materials																			
Valve body			Red bronze CuSn5ZnPb (Rg5)																
Valve seat			Stainless steel, mat. No. 1.4571																
Valve cone			Dezincing free brass CuZn36Pb2As																
Sealing DP			EPDM																
Sealing MCV			Metal																
Pressure relieve system	Control valve insert		-																
	Valve insert		Piston																

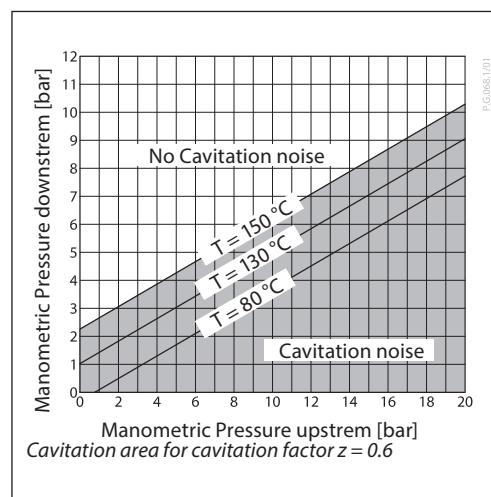
## Note:

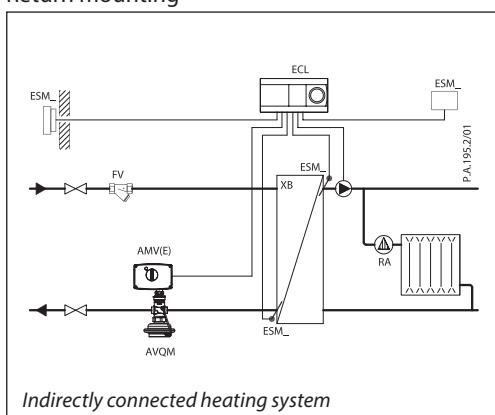
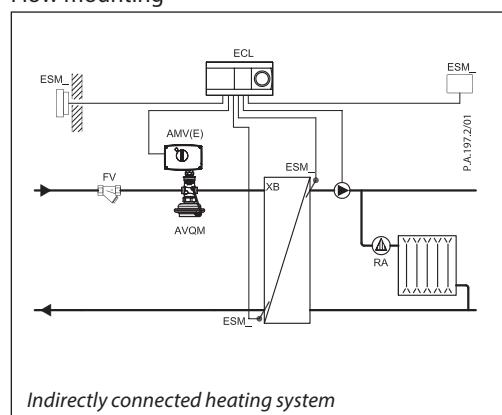
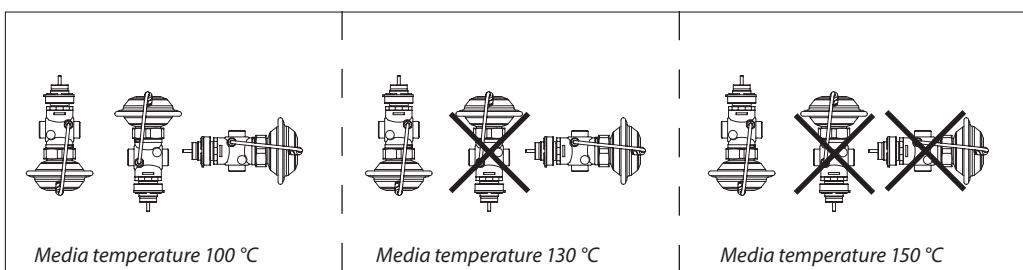
DP - diff. pressure controller, MCV - control valve

$$^{1)} \text{ For flows smaller than } Q_{max} \rightarrow \Delta p_{min} = \left( \frac{Q}{k_{vs}} \right)^2 + \Delta p_{MCV}$$

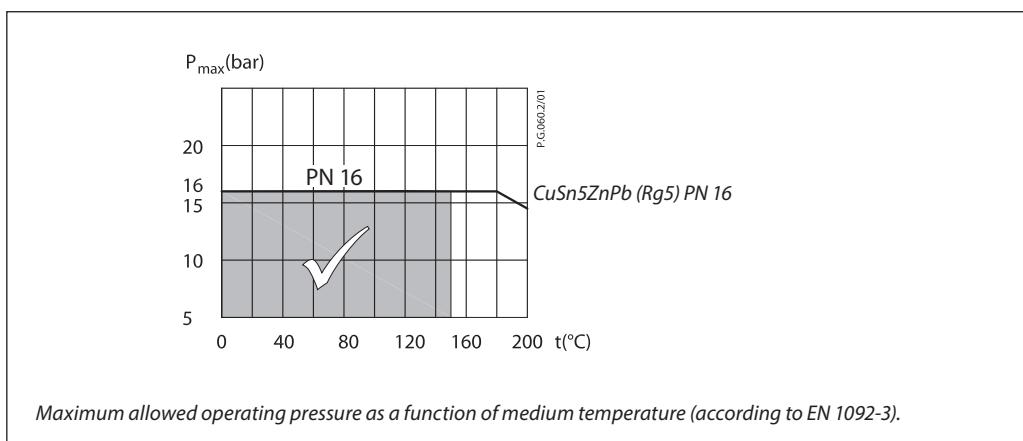
## Actuator

Type	AVQM	
Actuator size	cm <sup>2</sup>	39
Nominal pressure	PN	16
Differential pressure over MCV - motorized control valve	bar	0.2
Materials		
Housing	Zinc plated, DIN 1624, No. 1.0338	
Diaphragm	EPDM	
Impulse tube	Copper tube Ø 6 x 1 mm	



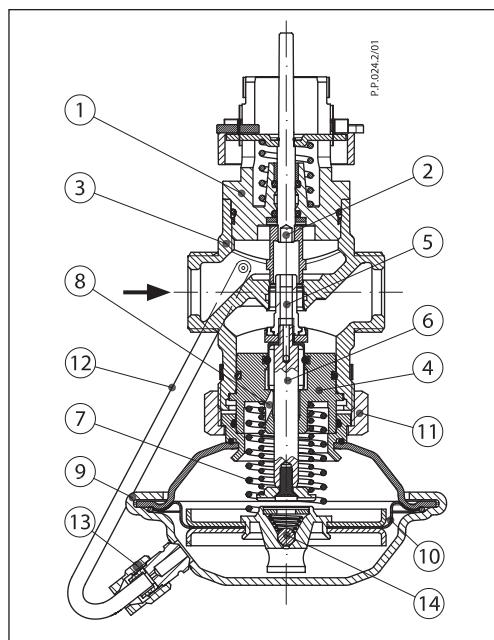
**Application principles****Return mounting****Flow mounting****Installation positions****Electrical actuator**

*Note!*  
Installation positions for electrical actuators AMV(E)  
have to be observed as well. Please see relevant  
Data sheet.

**Pressure temperature diagram**

**Design**

1. Control valve insert
2. Adjustable flow restrictor
3. Valve body
4. Valve insert
5. Pressure relieved valve cone
6. Valve stem
7. Built-in spring for flow rate control
8. Control drain
9. Actuator
10. Control diaphragm
11. Union nut
12. Impulse tube
13. Compression fitting for impulse tube
14. Excess pressure safety valve

**Function**

Flow volume causes pressure drop across the adjustable flow restrictor. Resulting pressures are being transferred through the impulse tubes and/or control drain in the actuator stem to the actuator chambers and act on control diaphragm for flow control. The flow restrictor diff. pressure is controlled and limited by means of built-in spring for flow control. Control valve closes on rising differential pressure and opens on falling differential pressure to control max flow.

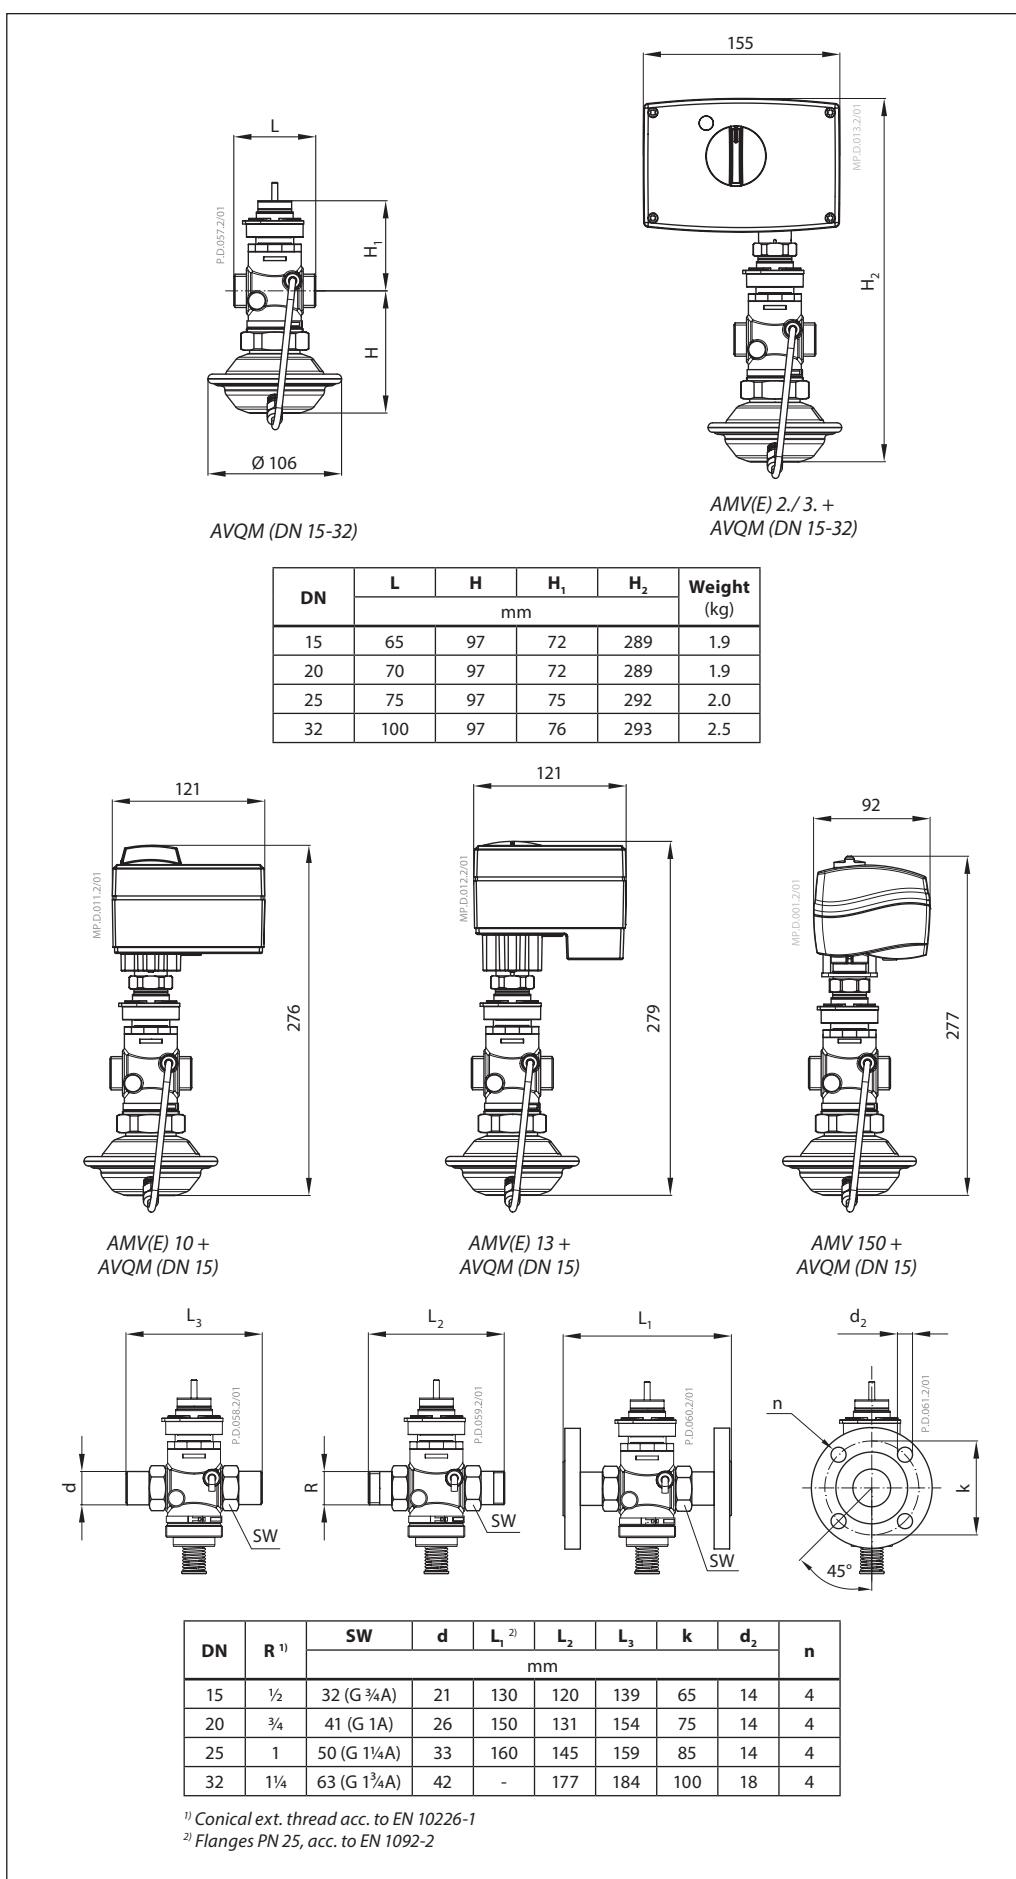
Additionally the electrical actuator will operate from zero to set max. flow according to the load.

Controller is equipped with excess pressure safety valve, which protects control diaphragm for flow control from too high differential pressure.

**Settings***Max flow limiting*

Max flow limiting is being done by the adjustment of the flow restrictor position. The adjustment can be performed on the basis of flow adjustment diagram (see relevant instructions) and/or by the means of heat meter.

## Dimensions





**Danfoss A/S**

Climate Solutions • [danfoss.com](http://danfoss.com) • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc, and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.